







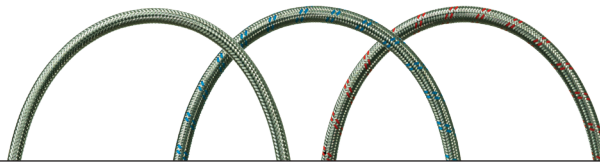





HOSES

MATERIAL SILICONE - STEAM RESISTANT



Part No.	D1	D	L (m)	Colour	Working Pressure (Bar)	Burst Pressure (Bar)	Bend Radius	
S10	10	15	25		15	45	40	1
S10B	10	15	25		15	45	40	1
S10R	10	15	25		15	45	40	1
S13	13	19	25		15	45	60	1
S13B	13	19	25		15	45	60	1
S13R	13	19	25		15	45	60	1
S19	19	29	25		15	45	100	1

Tube:

Clear Silicone Shore 60°.

Reinforcement:

Stainless steel overbraid with colour marking made of textile meta aramid.
(High temperature resistant)

Applications:

Designed for water and light chemical media for mould temperature controlling.

Temperature range:

Working temperature: Max +170°C / +338°F.

Tolerances:

DIN 7715.